

Figure 1

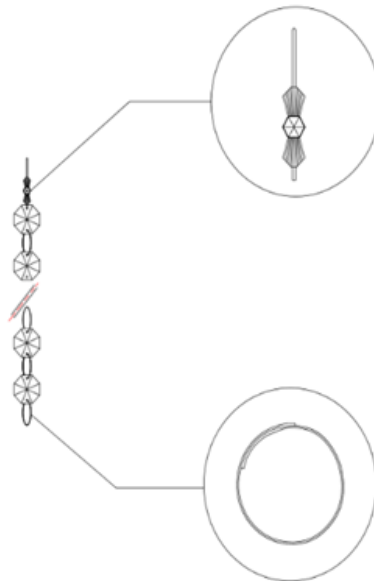


Figure 2

### **IMPORTANT SAFETY INSTRUCTIONS:**

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for 3 x 40-watt maximum E14 standard bulbs.
4. The ceiling must have at least the capacity of 5 times the weight of the ceiling light.

### **Warnings:**

1. Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.

The manufacturer and distributor accepts no liability for incorrect installation.

2. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
3. Deviation from instructions may result in a risk of fire or electric shock.









### **CARE INSTRUCTIONS:**

1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.
3. The cable/cord of this ceiling light cannot be replaced: If the cable is damaged, do not use the light.
6. Indoor use only.
7. To avoid the risk of fire, do not exceed the recommended wattage.
8. Keep away from children.

## **TO ASSEMBLE:**

Please check the part list to **BEFORE** assembly, if there is any parts missing please contact our custom service.

Part List:

Part	Quantity	Check ☑ / ☒
Mounting crossbar 	1	
Lamp body 	1	
Crystal bead A 	12	
Crystal bead string B 	12	
Crystal bead string C 	12	
Crystal bead string D 	7	
Crystal balls 	43	
Screw and plastic plug (in one bag) 	4	

## **TO ASSEMBLE:**

1. Drill 2 holes in the ceiling, insert the plastic plugs
2. Fix and securely fasten mounting crossbar by screws;
3. **MAKE CONNECTIONS:**(We recommend 2 people for the remainder of installation) Using wire connectors connect the SUPPLY GROUND WIRE to the FIXTURE GROUND WIRE., connect the SUPPLY BROWN WIRE(S) to the FIXTURE BROWN LEAD(S); Connect the SUPPLY BLUE WIRE to the FIXTURE BLUE LEAD(S). Wrap all connections with approved electrical tape;
4. Fix the canopy with crossbar by fasten the 2 screws on the side;  
**ATTENTION:** CONNECT THE BOWKNOT BUCKLES TO THE FIXTURE WHILE CONNECTING THE CIRCLE BUCKLES TO THE CRYSTAL BALLS AS FIGURE 2.
5. Attach 1 strand of crystal chain “D” on the centre bulge of fixture and attach the rest 6 strands of crystal chain “D” on the underside of fixture.
6. Attach 1 strands of crystal chain “C” on each fixture arms, there are total 12 strands of crystal chain “C” for 12 arms.
7. Attach 1 strands of crystal chain “B” on each fixture arms, there are total 12 strands of crystal chain “B” for 12 arms.
8. Attach 1 strands of crystal chain “A” on each fixture arms, there are total 12 strands of crystal chain “A” for 12 arms.

Importer

The address MH STAR UK LTD  
Unit 27, Perivale Park,  
Horsenden lane South  
Perivale, UB6 7RH