



1. Suitable age for 18-36 Months.
2. Maximum user weight: 20KGS.
3. Adult assembly required.



IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY


ASSEMBLY INSTRUCTION

1.WARNING:


- (1). this kind of product is fit for the children aged 18-36 months old and maximum load under 20kgs
- (2).WARNING-never leave the child unattended
- (3).prevent access to stairs, steps and uneven surface
- (4).guard all fires, heating and cooking appliances
- (5). remove hot liquids, electrical flexes and other potential hazards from reach
- (6).prevent collisions with glass in doors,windows and furniture
- (7).keep covering away from children to avoid suffocation
- (8).instrution for rountine maintenance and cleaning or washing
- (9). before using, this product will be inspected and assembled by the adult

2.The notices of installing and changing batteries

- (1). installing and changing batteries should be fulfilled by adults
- (2).install the battries refer to the picturs(1) of the parts: the installation of AAA (1.5V) batteries: open the cover, install the battries correctly according to the marks of the postive and the negative erectrodes , finally put on the cover and fasten the cover




- (3).the unchargable battries must not be changed and do not mix the different types of the battries(or the new and the old) to use together
- (4).take out the used-up batteries and avoid short circuit.


 <p>1. Body</p>	 <p>2. Head of music</p>	 <p>3. Handlebar</p>	 <p>4. Reflector</p>
 <p>5. Front mudguard</p>	 <p>6. Front wheel</p>	 <p>7. A rear axle</p>	 <p>8. Rear wheel*2</p>
 <p>9. Axle sleeve*2</p>	 <p>10. Wheel cover*2</p>	 <p>11. Sleeve pipe *2</p>	 <p>12. Gasket *2</p>
 <p>13. Cotter *2</p>	 <p>14. Screw</p>	 <p>15. Nut</p>	 <p>16. Tapping screw *2</p>

INSTALLATION STEPS

Step 1 Install the rear wheel

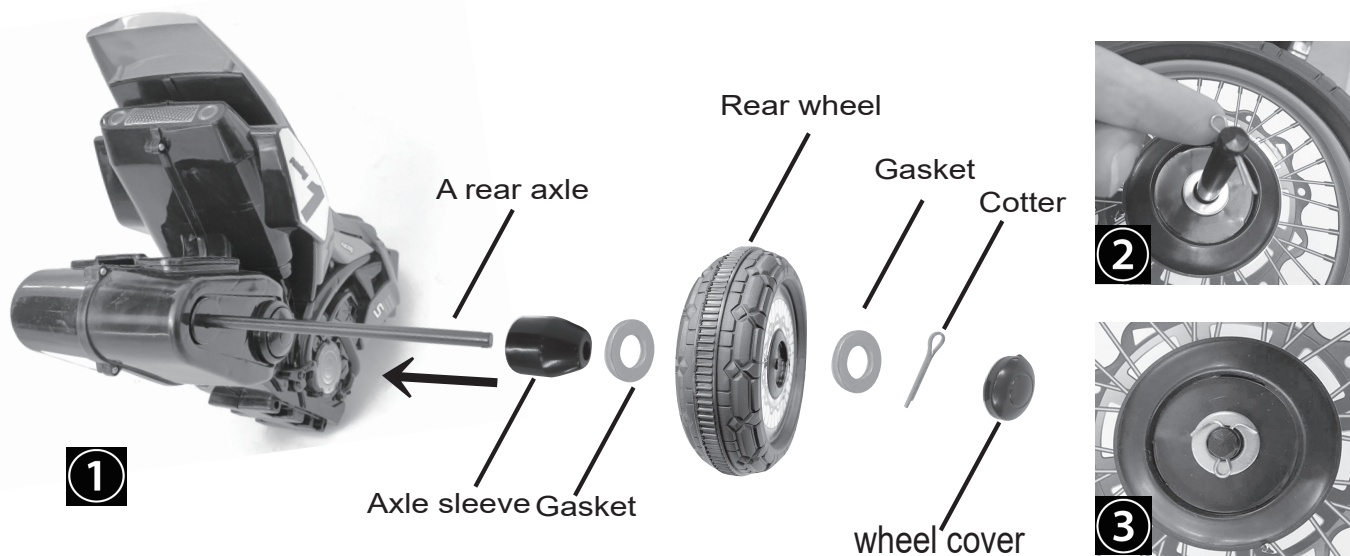


As shown by the arrow, insert the shaft into the car body; Press the axle sleeve, gasket, rear wheel, gasket, cotter, wheel cover (as shown in Figure 1) through the axle, lock the cotter (as shown in Figure 2 and Figure 3), and finally push the wheel cover to a click.

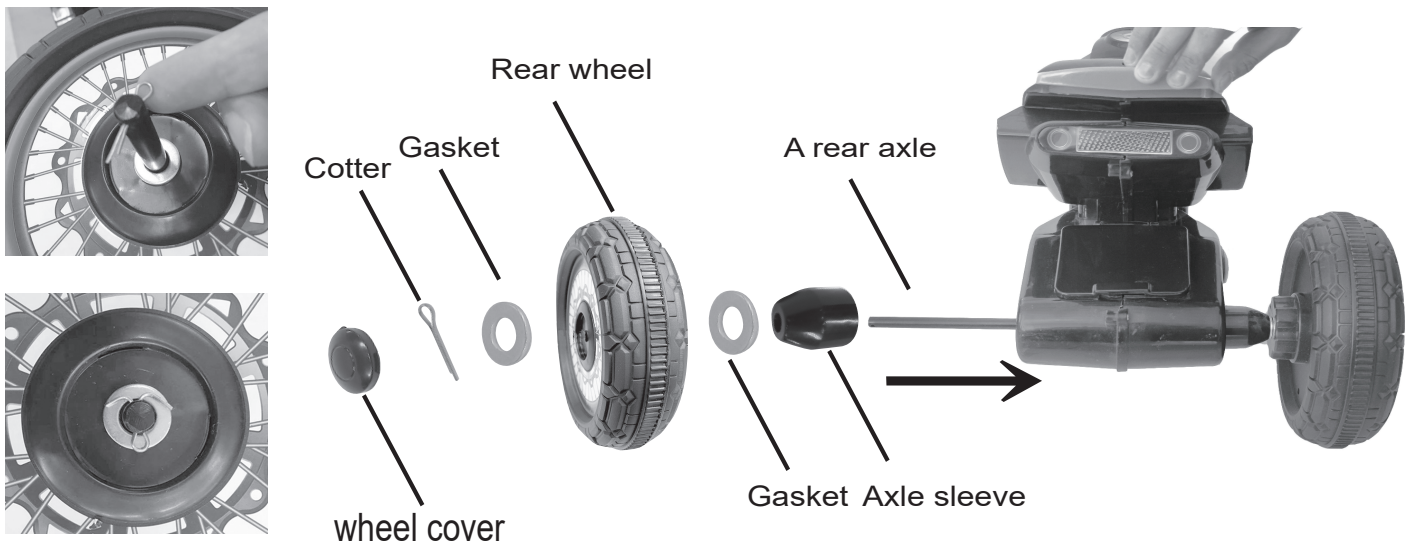


Installing the other side wheel is the same as step 1.

Step 2 Install mudguard

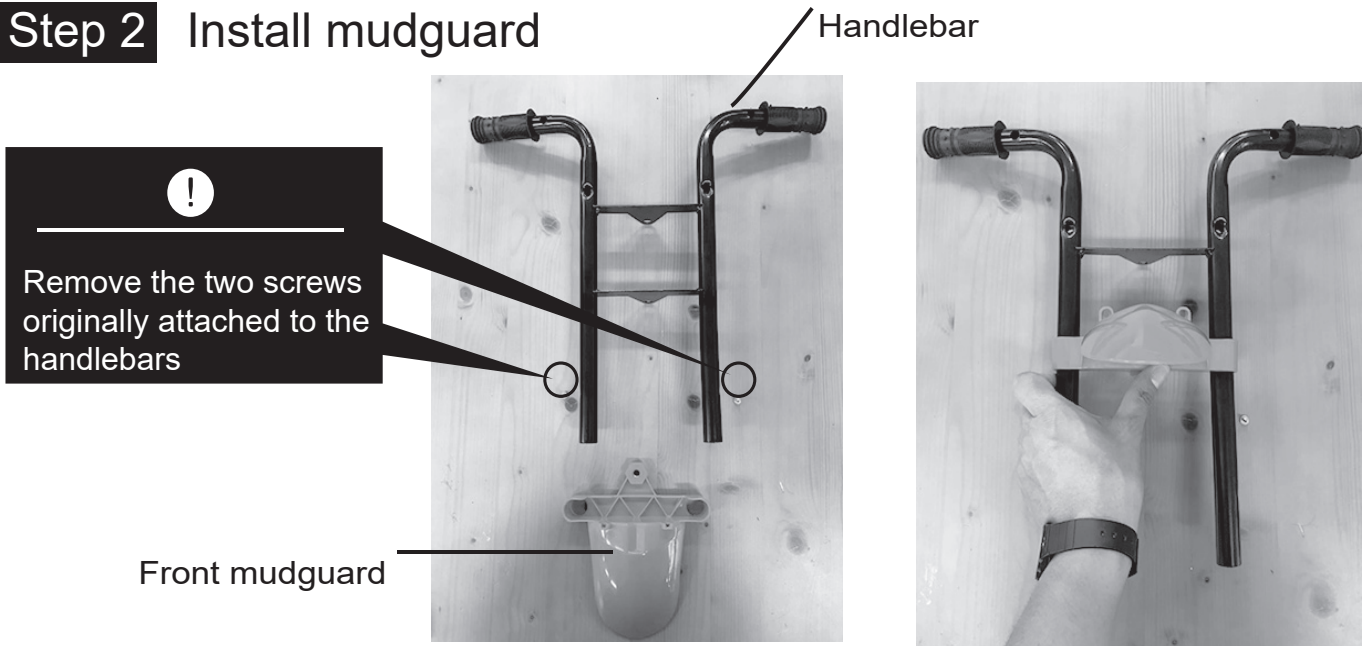


Next, Remove the original screw from handlebar.
As indicated by arrow, attach the mudguard to the handlebar.

Step 3 Install Head of music

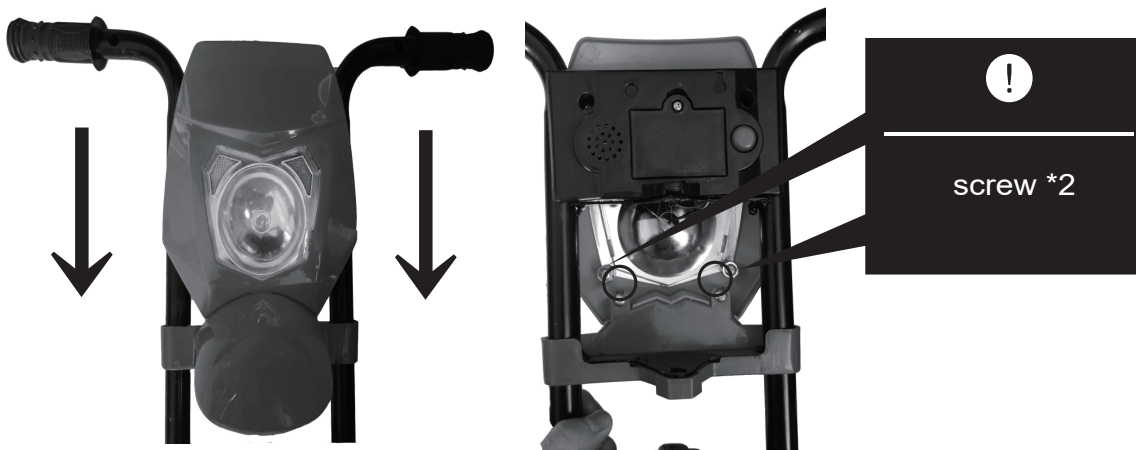

Put the front mask on the handlebar (like the picture), align the mudguard and front mask's hole, tighten the two screws.

Step 4 Install sleeve pipe

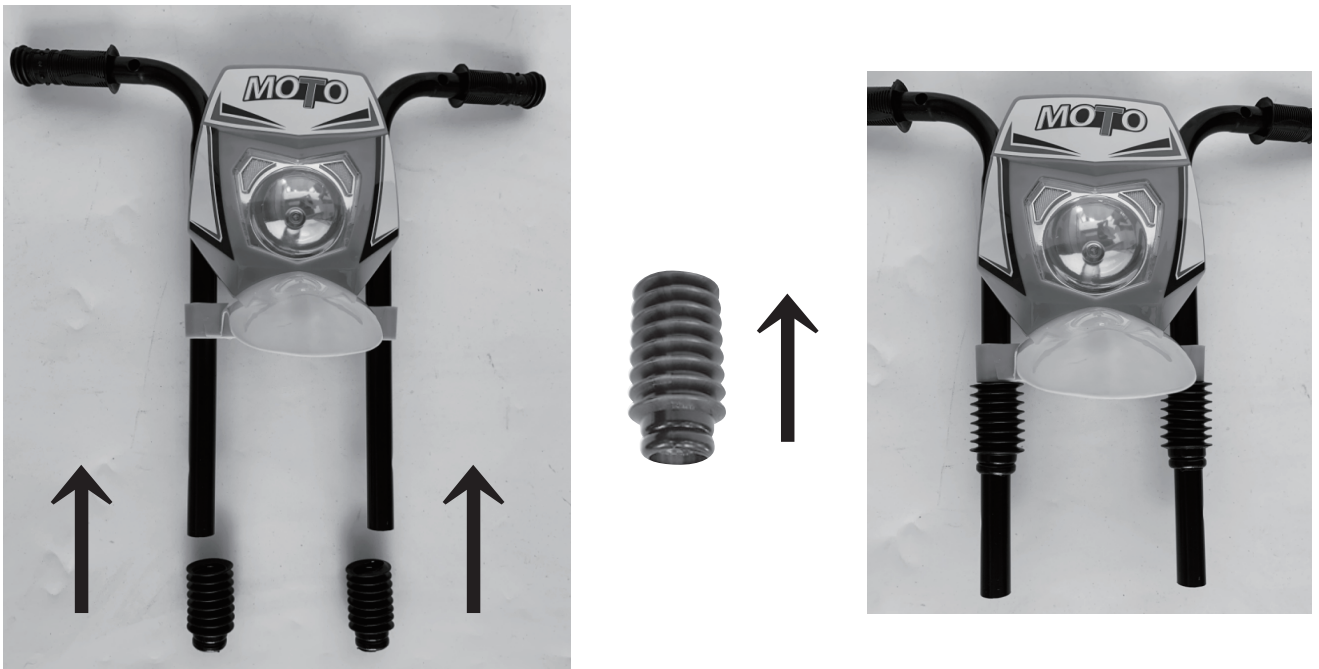


As indicated by arrow, install the sleeve pipe into the bottom of handlebar.

Step 5 Install front wheel



Align front wheel and the bottom of handlebar, insert the handlebar into front wheel (like picture), use Step 2 removable screws ,then tighten the screws .

Step 6 Connect body & handlebar

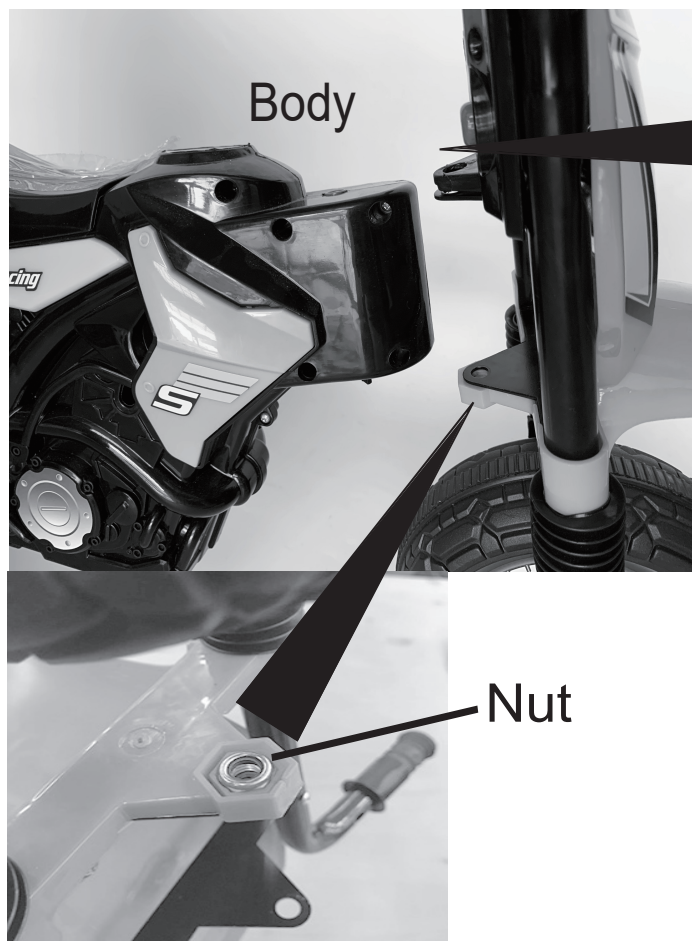

Screw



Please note that the tightening of the rod is excessive. There was a danger of not being able to move the steering wheel.

After aligning the body and handlebar, insert the Machine screw straightly from the top, use tools to tighten the Lock nut (like the pictures above).

Step 7 Attach the reflector



Remove the screw of the reflector, install to handlebar (like the picture), then tighten the screw.

Step 8 Install the battery



Remove the screw of the cell box and take off the cover;
Use three AAA 1.5V cells, please install the batteries properly.
Close the cover, tighten the screw.

Warning:

Do not mix to use the batteries, such as used, unused, different type, etc.
Keep the child away from the battery.

US



001-877-644-9366
customerservice@aosom.com

CA



001-855-537-6088
customerservice@aosom.ca

UK



0044-800-240-4004
enquiries@mhstar.co.uk

DE



0049-(0)40-88307530
service@aosom.de

FR



0033-1-84166106
contact@aosom.fr

ES



0034-931294512
atencioncliente@aosom.es

IT



0039-0249471447
clienti@aosom.it

Aosom